

## Supplementary manual for UVR610-DC

The UVR610-DC can be supplied with **24 V DC** power via the 24 V input. The device can therefore be connected to any mains voltage from 0 to 230 V AC (via the phase and neutral conductors).


The earth cable of the 24 V supply must be connected to any **GND** terminal on the upper terminal strip.

**The left jumper J2 must always remain in the lower position.**

This modification must be considered correspondingly for all other connection work.

$V_{in} = 18-24 \text{ V DC}$

$V_{pp} < 1 \text{ V (residual ripple)}$

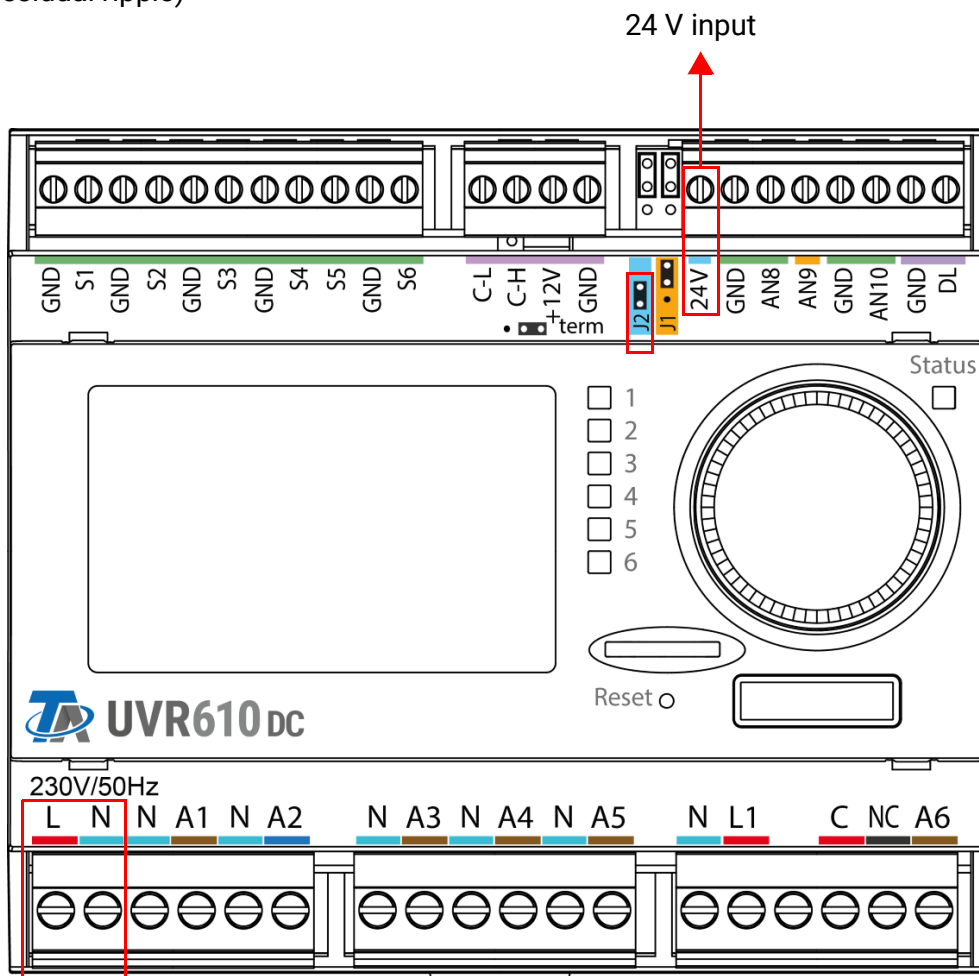

L ... Phase conductor  
N ... Neutral conductor

This application invalidates various technical specifications stated in the enclosed operating and installation instructions (such as those relating to the power supply, breaking capacity and supply cable).

